



Choose certainty.  
Add value.

## Technical Report No. 64.190.12.00108.01B

Rev. 00

Dated 2012-03-15

Client: Eastern Sports Industrial Co.,Ltd  
Address: No.2 Wayaobei Industrial Zone,Wulian Community,Longcheng Street,  
Longgang District,Shenzhen,China

Test subject: Product: STAGE  
Type: ESIASSP4x4, ESIASSP4x8

Test specification: According to the client' s requirements.  
Details see Clause 3.

Purpose of examination: Test according to the test specification.

Test result: Details see the test result in Clause 3.

This technical report may only be quoted in full. Any use for advertising purposes must be granted in writing. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production.

## 1 Description of the test subject

### 1.1 Function

Manufacturer' s specification for intended use,  
STAGE

### 1.2 Technical Data

Model: ESIASSP4x4  
Platform dimension (L x W): 1220 mm x 1220 mm  
Platform height: 800 mm, 1070 mm  
Weight: 50,0 kg

Model: ESIASSP4x8  
Platform dimension (L x W): 2440 mm x 1220 mm  
Platform height: 800 mm, 1070 mm  
Weight: 75,5 kg

### 1.3 Product Photos

ESIASSP4x4



ESIASSP4x8



## 2 Order

### 2.1 Date of Purchase Order

2012-02-28

### 2.2 Receipt of Test Sample

2012-03-13

### 2.3 Date of Testing

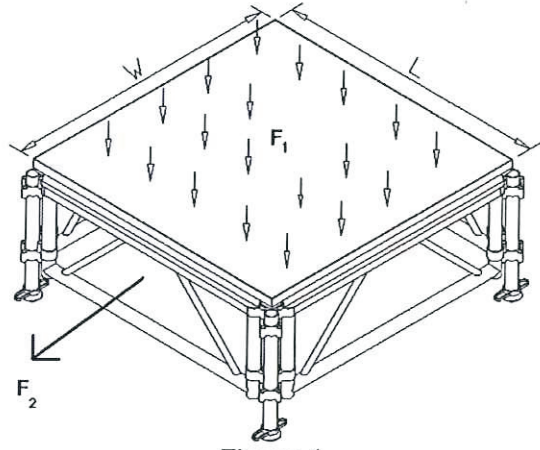
From 2012-03-13 to 2012-03-15

### 2.4 Points of Non-compliance or Exceptions of the Test Procedure

NA

### 3 Test Results

**Verdict: P = passed; F = failed; NA = not applicable.**

Clause	Requirement Test	Remark	Verdict
1	<p><b>Loading test</b></p> <p>A test vertical load <math>F_1</math> (see table 1) shall be distributed uniformly applied to the whole surface of the platform for a period of 5 minutes, then applied a horizontal force <math>F_2</math> of 1000N to the stage tested according to Figure 1.</p> <p>After removal of the test load, the stage platforms shall not show any visible damages such as cracks, indentations etc.</p>  <p style="text-align: center;">Figure 1</p>	No visible damage was found after test.	P

**Table 1**

Model	Test load $F_1$ (kg)
ESIASSP4X4	1000
ESIASSP4X8	1600

TÜV Product Service Ltd. Guangzhou Branch  
TÜV SÜD Group



Engineer:   
Calvin Yang

Technical Report Checked:   
Filippo Wei